

# 5 Curl-free fields and electrostatic potential

- Mathematically, we can generate a curl-free vector field  $\mathbf{E}(x, y, z)$  as

$$\mathbf{E} = -\left(\frac{\partial V}{\partial x}, \frac{\partial V}{\partial y}, \frac{\partial V}{\partial z}\right),$$

by taking the **gradient** of any scalar function  $V(\mathbf{r}) = V(x, y, z)$ . The gradient of  $V(x, y, z)$  is defined to be the vector

$$\nabla V \equiv \left(\frac{\partial V}{\partial x}, \frac{\partial V}{\partial y}, \frac{\partial V}{\partial z}\right),$$

pointing in the direction of increasing  $V$ ; in abbreviated notation, curl-free fields  $\mathbf{E}$  can be indicated as

$$\mathbf{E} = -\nabla V.$$

- **Verification:** Curl of vector  $\nabla V$  is

$$\nabla \times (\nabla V) = \begin{vmatrix} \hat{x} & \hat{y} & \hat{z} \\ \frac{\partial}{\partial x} & \frac{\partial}{\partial y} & \frac{\partial}{\partial z} \\ \frac{\partial V}{\partial x} & \frac{\partial V}{\partial y} & \frac{\partial V}{\partial z} \end{vmatrix} = \hat{x}0 - \hat{y}0 - \hat{z}0 = 0.$$

- If  $\mathbf{E} = -\nabla V$  represents an **electrostatic field**, then  $V$  is called the **electrostatic potential**.
  - Simple dimensional analysis indicates that units of electrostatic potential must be volts (V).

- The prescription  $\mathbf{E} = -\nabla V$ , including the minus sign (optional, but taken by convention in electrostatics), ensures that electrostatic field  $\mathbf{E}$  points from regions of “high potential” to “low potential” as illustrated in the next example.

**Example 1:** Given an electrostatic potential

$$V(x, y, z) = x^2 - 6y \text{ V}$$


in a certain region of space, determine the corresponding electrostatic field  $\mathbf{E} = -\nabla V$  in the same region.

**Solution:** The electrostatic field is

$$\mathbf{E} = -\nabla(x^2 - 6y) = -\left(\frac{\partial}{\partial x}, \frac{\partial}{\partial y}, \frac{\partial}{\partial z}\right)(x^2 - 6y) = (-2x, 6, 0) = -\hat{x} 2x + \hat{y} 6 \text{ V/m.}$$

Note that this field is directed from regions of high potential to low potential. Also note that electric field vectors are perpendicular everywhere to “equipotential” contours.

Electrostatic fields  $\mathbf{E}$  point from regions of “high  $V$ ” to “low  $V$ ”

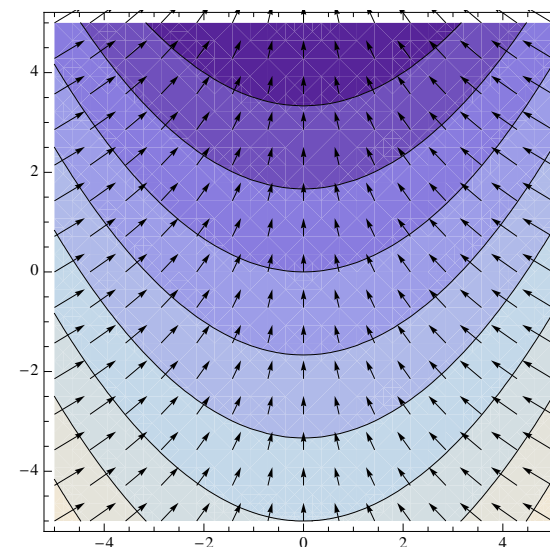

Light colors indicate “high  $V$ ”  
dark colors “low  $V$ ”

Given an electrostatic potential  $V(x, y, z)$ , finding the corresponding electrostatic field  $\mathbf{E}(x, y, z)$  is a straightforward procedure (taking the negative gradient) as already illustrated in Example 1.

The reverse operation of finding  $V(x, y, z)$  from a given  $\mathbf{E}(x, y, z)$  can be accomplished by performing a **vector line integral**

$$\int_p^o \mathbf{E} \cdot d\mathbf{l}$$

in 3D space, since, as shown below, such integrals are “path independent” for curl-free fields  $\mathbf{E} = -\nabla V$ .

- The **vector line integral**

$$\int_p^o \mathbf{E} \cdot d\mathbf{l}$$

over an integration path  $C$  extending from a point  $p = (x_p, y_p, z_p)$  in 3D space to some other point  $o = (x_o, y_o, z_o)$  is *defined to be*

- the limiting value of the sum of dot products  $\mathbf{E}_j \cdot \Delta\mathbf{l}_j$  computed over all sub-elements of path  $C$  having incremental lengths  $|\Delta\mathbf{l}_j|$  and unit vectors  $\Delta\mathbf{l}_j/|\Delta\mathbf{l}_j|$  directed from  $p$  towards  $o$  — the limiting value is obtained as all  $|\Delta\mathbf{l}_j|$  approach zero (i.e., with increasingly finer subdivision of  $C$  into  $|\Delta\mathbf{l}_j|$  elements).
- Computation of the integral (see example below) involves the use of infinitesimal displacement vectors


$$d\mathbf{l} = \hat{x}dx + \hat{y}dy + \hat{z}dz = (dx, dy, dz)$$

and vector dot product

$$\mathbf{E} \cdot d\mathbf{l} = (E_x, E_y, E_z) \cdot (dx, dy, dz) = E_x dx + E_y dy + E_z dz.$$

The integral

$$\int_p^o \mathbf{E} \cdot d\mathbf{l} = \int_p^o (E_x dx + E_y dy + E_z dz)$$

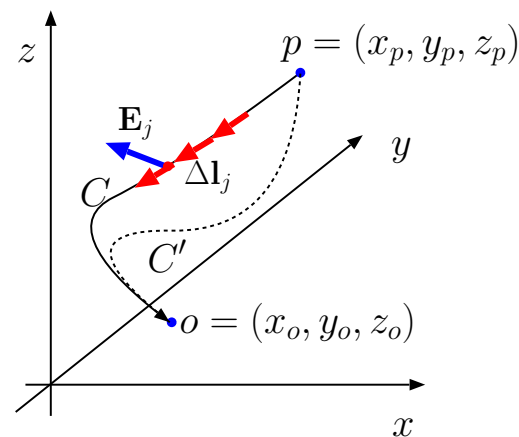

will in general be *path dependent* except for when  $\mathbf{E}$  is curl-free.

**Example 2:** The field  $\mathbf{E} = \hat{x}y \pm \hat{y}x$  is curl-free with the + sign, but not with - as verified below by computing  $\nabla \times \mathbf{E}$ . Calculate the line integral of  $\mathbf{E}$  (for both signs,  $\pm$ ) from a point  $o = (0, 0, 0)$  to point  $p = (1, 1, 0)$  for two different paths  $C$  going through points  $u = (0, 1, 0)$  and  $l = (1, 0, 0)$ , respectively (see margin).

**Solution:** First we note that

$$\nabla \times (\hat{x}y \pm \hat{y}x) = \begin{vmatrix} \hat{x} & \hat{y} & \hat{z} \\ \frac{\partial}{\partial x} & \frac{\partial}{\partial y} & \frac{\partial}{\partial z} \\ y & \pm x & 0 \end{vmatrix} = \hat{z}(\pm 1 - 1)$$

which confirms that  $\mathbf{E} = \hat{x}y \pm \hat{y}x$  is curl-free with with + sign, but not with -. In either case, the integral to be performed is

$$\int_o^p \mathbf{E} \cdot d\mathbf{l} = \int_o^p (E_x dx + E_y dy + E_z dz) = \int_o^p (y dx \pm x dy).$$

For the first path  $C_u$  going through  $u = (0, 1, 0)$ , we have


$$\int_o^p (y dx \pm x dy) = \int_{y=0}^1 (\pm x) dy|_{x=0} + \int_{x=0}^1 y dx|_{y=1} = 0 + 1 = 1.$$

For the second path  $C_l$  going through  $l = (1, 0, 0)$ , we have


$$\int_o^p (y dx \pm x dy) = \int_{x=0}^1 y dx|_{y=0} \pm \int_{y=0}^1 x dy|_{x=1} = 0 \pm 1 = \pm 1.$$

Clearly, the result shows that the line integral  $\int_o^p \mathbf{E} \cdot d\mathbf{l}$  is *path independent* for  $\mathbf{E} = \hat{x}y + \hat{y}x$  which is curl-free, and path dependent for  $\mathbf{E} = \hat{x}y - \hat{y}x$  in which case  $\nabla \times \mathbf{E} \neq 0$ .

**Curl-free: path-independent line integrals**

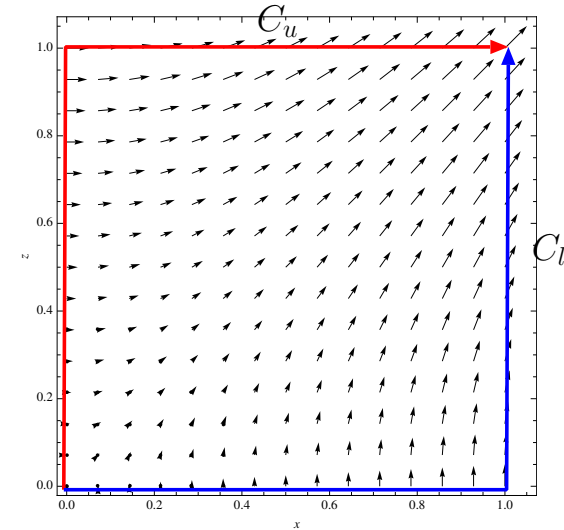

**“Curly”: path-dependent line integrals**

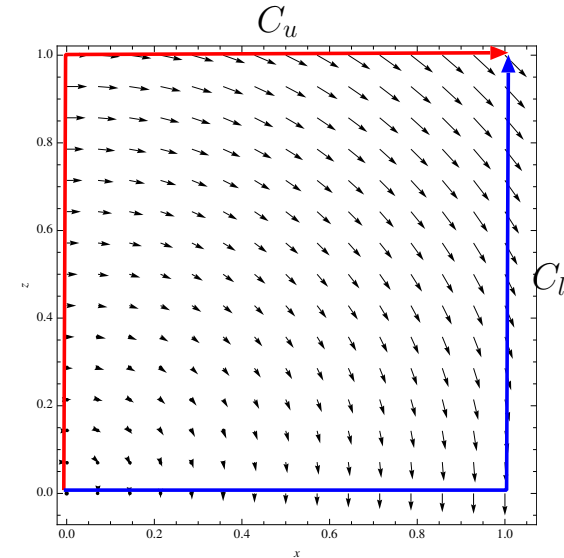

- The **mathematical reason** why curl-free fields have path-independent line integrals is because in those occasions the integrals can be written in terms of **exact differentials**:

- for curl-free  $\mathbf{E} = \hat{x}y + \hat{y}x$  we have  $\mathbf{E} \cdot d\mathbf{l}$  as an *exact differential*  $ydx + xdy = d(xy)$  of the function  $xy$ , in which case  $\int_o^p \mathbf{E} \cdot d\mathbf{l} = xy|_o^p = (1 \cdot 1 - 0 \cdot 0) = 1$  over all paths.
- for  $\mathbf{E} = \hat{x}y - \hat{y}x$  with  $\nabla \times \mathbf{E} = -2\hat{z} \neq 0$ , on the other hand,  $\mathbf{E} \cdot d\mathbf{l} = ydx - xdy$  does not form an exact differential  $-dV$ , and thus there is no path-independent integral  $-V|_o^p$ , nor an underlying potential function  $V$ .

$\mathbf{E} \cdot d\mathbf{l}$  is *guaranteed* to be an exact differential if  $\mathbf{E} = -\nabla V = (-\frac{\partial V}{\partial x}, -\frac{\partial V}{\partial y}, -\frac{\partial V}{\partial z})$ , since in that case the differential of  $V(x, y, z)$ , namely

$$dV \equiv \frac{\partial V}{\partial x}dx + \frac{\partial V}{\partial y}dy + \frac{\partial V}{\partial z}dz, \text{ is precisely } -E_x dx - E_y dy - E_z dz = -\mathbf{E} \cdot d\mathbf{l}.$$


- In that case

$$\int_p^o \mathbf{E} \cdot d\mathbf{l} = - \int_p^o dV = \int_o^p dV = V_p - V_o$$

is independent of integration path; thus, if we call  $o$  the “ground”, and set  $V_o = 0$ , then


$$V_p = \int_p^o \mathbf{E} \cdot d\mathbf{l}$$

denotes the potential drop from (any) point  $p$  to ground  $o$ .

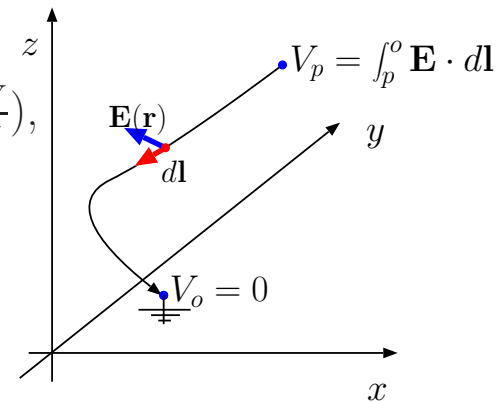

- The **physical reason** why this integral formula for potential  $V_p$  works with *any* integration path is the principle of **energy conservation**:

- integral  $\int_p^o \mathbf{E} \cdot d\mathbf{l}$ , namely the “voltage drop” from  $p$  to  $o$ , represents the **work done per unit charge** by the field  $\mathbf{E}$  in moving charges from location  $p$  to location  $o$ <sup>1</sup>, so if the line integral were path-dependent (in reaching from  $p$  to  $o$ ) there would be ways of creating net energy by making a charge  $q$  follow special closed paths within the electrostatic field  $\mathbf{E}$ , in violation of the general principle of energy conservation (that permits energy conversion but not creation or destruction).

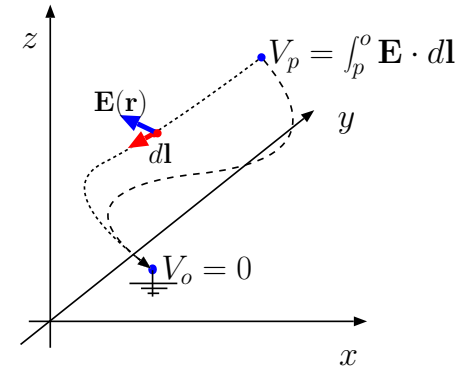

As long as  $\mathbf{E}$  is curl-free, line integral is path-independent and produces the voltage drop from point  $p$  to “ground”  $o$ .

---

<sup>1</sup>Either to increase the kinetic energy of the charge if charge transport from  $p$  to  $o$  is *unimpeded* (as for a test charge accelerating between a pair of capacitor plates) or else in pushing the charge against frictional forces (as through a resistive wire) both at the expense of the energy stored in the field. On the other hand, work done (i.e., the voltage drop) by the field would be *negative* if charges  $q > 0$  were moved from  $p$  to  $o$  *against* the local electric field (as within a battery), in which case there would be a positive *voltage rise* from  $p$  to  $o$  representing energy gain for the field per unit charge transported from  $p$  to  $o$ .

**Example 3:** Given that  $V_o = V(0, 0, 0) = 0$  and

$$\mathbf{E} = 2x\hat{x} + 3z\hat{y} + 3(y + 1)\hat{z} \frac{\text{V}}{\text{m}},$$

determine the electrostatic potential  $V_p = V(X, Y, Z)$  at point  $p = (X, Y, Z)$  in volts.

**Solution:** Assuming that the field is curl-free (it is), so that any integration path can be used, we find that

$$\begin{aligned} V_p &= \int_p^o \mathbf{E} \cdot d\mathbf{l} = - \int_o^p \mathbf{E} \cdot d\mathbf{l} = - \int_o^p (2x dx + 3z dy + 3(y + 1) dz) \\ &= - \int_0^X 2x dx|_{y,z=0} - \int_0^Y 3z dy|_{x=X,z=0} - \int_0^Z 3(y + 1) dz|_{x=X,y=Y} \\ &= -X^2 - 0 - 3(Y + 1)Z. \end{aligned}$$


This implies

$$V(x, y, z) = -x^2 - 3(y + 1)z \text{ V}.$$

Note that

$$\begin{aligned} -\nabla(-x^2 - 3(y + 1)z) &= \nabla(x^2 + 3(y + 1)z) \\ &= \hat{x}2x + \hat{y}3z + \hat{z}3(y + 1) \end{aligned}$$

yields the original field  $\mathbf{E}$ , which is an indication that  $\mathbf{E}$  is indeed curl-free.

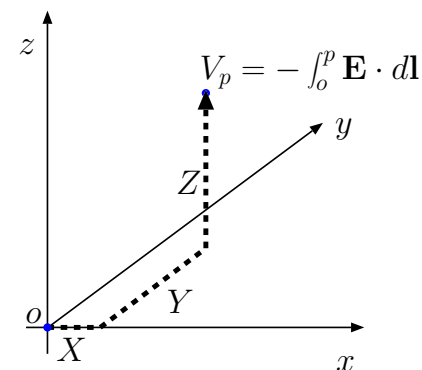

A *voltmeter* with its (+/red) probe contacting point  $p$  and its (-/black) probe contacting point  $o$  would display (by analog or digital means) the numerical value of

$$V_p = \int_p^o \mathbf{E} \cdot d\mathbf{l}$$

with the integration path consisting of the path defined by the probe wires. The voltmeter reading would be independent of the path configuration when the field  $\mathbf{E}$  is electrostatic.

For the voltmeter not to perturb the field it is probing, its input impedance need to be much greater than the impedance between points  $p$  and  $o$ .

**Alternate Solution — Exact Differential Method:** Note that

$$\begin{aligned}\mathbf{E} \cdot d\mathbf{l} &= (2x\hat{x} + 3z\hat{y} + 3(y+1)\hat{z}) \cdot (\hat{x}dx + \hat{y}dy + \hat{z}dz) \\ &= 2x dx + 3z dy + 3(y+1) dz = 2x dx + 3(y dz + z dy) + 3 dz \\ &= d(x^2 + 3yz + 3z) = -dV.\end{aligned}$$

Therefore

$$V(x, y, z) = -x^2 - 3yz - 3z + C,$$

where the integration constant  $C$  should be chosen so that  $V(0, 0, 0) = 0$ . The result is

$$V(x, y, z) = -x^2 - 3(y+1)z$$

as before.



**Example 5:** According to Coulomb's law electrostatic field of a proton with charge  $Q = e$  (where  $-e$  is electronic charge) located at the origin is given as

$$\mathbf{E} = \frac{e}{4\pi\epsilon_0 r^2} \hat{r},$$

where


$$r = \sqrt{x^2 + y^2 + z^2} \quad \text{and} \quad \hat{r} = \frac{(x, y, z)}{r}.$$

Determine the electrostatic potential field  $V$  established by charge  $Q = e$  with the provision that  $V \rightarrow 0$  as  $r \rightarrow \infty$  (i.e., ground at infinity).

**Solution:** Field  $\mathbf{E}$  and its potential  $V$  will exhibit spherical symmetry in this problem. Therefore, with no loss of generality, we can calculate the line integral from a point  $p$  at a distance  $r$  from the origin to a point  $o$  at  $\infty$  (the specified ground) along, say, the  $z$ -axis. Approaching the problem that way, the potential drop from  $r$  to  $\infty$  is

$$\begin{aligned} V(r) &= \int_{z=r}^{\infty} \frac{e}{4\pi\epsilon_0 z^2} \hat{z} \cdot \hat{z} dz \\ &= -\frac{e}{4\pi\epsilon_0 z} \Big|_r^{\infty} = \frac{e}{4\pi\epsilon_0 r}. \end{aligned}$$

- To convert electrostatic potential  $V_p$  (in volts) at any point  $p$  to potential energy of a charge  $q$  brought to the same point, it is sufficient to multiply  $V_p$  with  $q$  (or just the sign of  $q$ , depending on which energy units we want to use — see the next example).

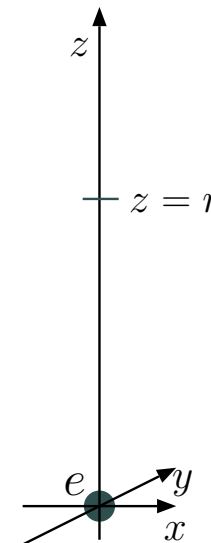

Or else (exact differential method):

$$\mathbf{E} \cdot d\mathbf{l} = \left( \frac{e}{4\pi\epsilon_0 r^2} \hat{r} \right) \cdot \hat{r} dr = d\left( \frac{-e}{4\pi\epsilon_0 r} \right) = -dV$$

leading to

$$V(r) = \frac{e}{4\pi\epsilon_0 r}$$

(using an integration constant of zero).

**Example 6:** In view of Example 5, what are the potential energies of a proton  $e$  and an electron  $-e$  placed at distance  $r = a$  away from the proton at the origin, where distance

$$a \equiv \frac{4\pi\epsilon_0 \hbar^2}{e^2 m_e} = 0.529 \times 10^{-10} \text{ m}$$

stands for *Bohr radius* — it is the mean distance of the ground state electron in a hydrogen atom from the center of the atom. Recall that  $e = 1.602 \times 10^{-19}$  C and  $\epsilon_0 \approx 10^{-9}/36\pi$  F/m.

**Solution:** Let's first evaluate the potential  $V(r)$  at  $r = a$ :

$$V(a) = \frac{e}{4\pi\epsilon_0 a} \approx \frac{(1.6 \times 10^{-19})36\pi \times 10^9}{4\pi \times 0.53 \times 10^{-10}} = \frac{9 \times 1.6}{0.53} = 27.2 \text{ V}.$$

For the proton, potential energy in Joules is calculated by multiplying  $V(a) = 27.2$  V with  $q = e = 1.602 \times 10^{-19}$  C. However, by referring to  $1.602 \times 10^{-19}$  J of energy as 1 eV (electron-volt), it is more convenient to refer to potential energy  $eV(a)$  of the proton at  $r = a$  as

$$eV(a) = 27.2 \text{ eV}.$$

Likewise, for a particle with charge  $q = -e$ , i.e., an electron, potential energy at the same location is

$$-eV(a) = -27.2 \text{ eV}.$$